


All-in-one Air-cooled ESS Cabinet

ECO-E101WX

The all-in-one air-cooled ESS cabinet integrates long-life battery, efficient balancing BMS, high-performance PCS, active safety system, smart distribution and HVAC into one cabinet, enabling long-term operation with safety, stability and reliability. Through AC side parallel connection, it achieves agile deployment of ESS power station with flexible capacity expansion.

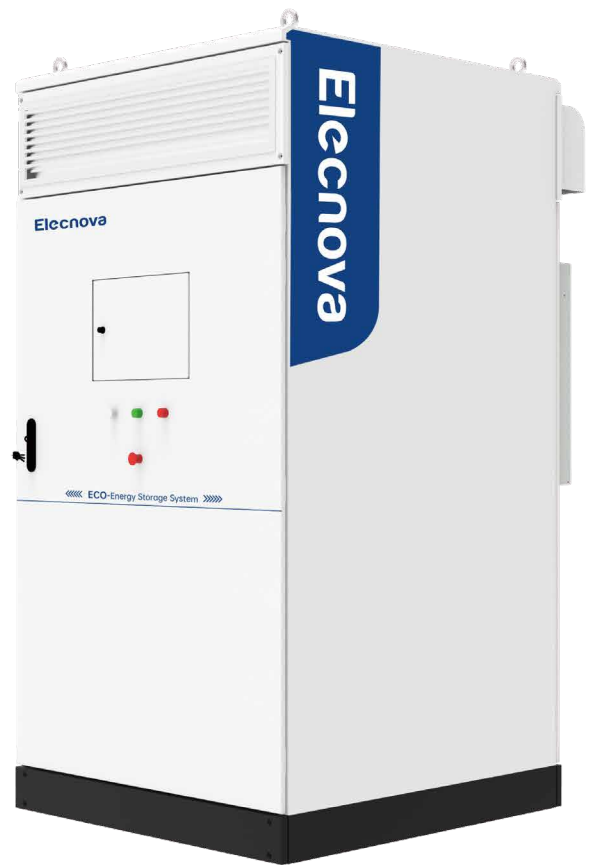

1P fast charge /discharge rate.



Support DC-DC modular expansion to achieve PV access.



Support hybrid inverter(optional) to achieve integration of PV and ESS.



Small-scale C&I ESS scenario



Transformer dynamic expansion, frequency regulation and peak shaving



EV fast charging/super charging station



Microgrid with PV-plus ESS

Specifications

DC Side

Cell Type	LFP 120Ah
Battery System	1P264S
Rated Energy	101kWh
Rated Voltage	844.8V
Voltage Range	739.2V ~ 950.4V

AC Side

Rated Power	100kW
Max. Power	110kW
Nominal Voltage	400Vac/3P+N+PE
Nominal Frequency	50Hz/60Hz
THDi	≤3%
DC Ratio	<0.5%lpn
Power Factor	-1 lagging ~ 1 leading

General

Efficiency	≥89%
Charge/Discharge Rate	1P
DoD	95% (25±2°C)
Cycle Life	≥5500 cycles
Ingress Rating	IP55
Cooling	Forced air cooling
Operating Temperature	-25°C ~ 55°C
Humidity	0 ~ 95%RH, non-condensing
Altitude	≤2,000m (derating above 2,000m)
Dimensions (W*D*H)	1,250*1,200*2,150 (mm)
Weight	2,000kg
Fire Safety	Aerosol
Connectivity	Ethernet /RS485
Compliance	UN38.3, IEC62477, IEC61000, IEC62619, IEC63056, UL9540A, EN50549

